別表第16(3)の表を次のように改める。


隔離方法	水平方向					
		非開放型相互		非開放型と開放型		開放型相互	
		甲板上積載	甲板下積載	甲板上積載	甲板下積載	甲板上積載	甲板下積載
1	船の長さ方向	①	①	①	①	③	③
	船の幅方向	①	①	①	①	③	③
2	船の長さ方向	②	⑦	②	⑦	②	⑭
	船の幅方向	③	⑧	③	⑦	②	⑭
3	船の長さ方向	④	⑨	⑪	⑨	⑤	⑮
	船の幅方向	④	⑨	⑪	⑨	⑥	⑥
4	船の長さ方向	⑤	⑩	⑤	⑫	⑬	⑥
	船の幅方向	⑥	⑥	⑥	⑥	⑥	⑥

別表第17表中「引火点が61℃以下のもの」を「引火点が60℃以下のもの」に改める。

第４号様式を次のように改める。

第４号様式（第10条の３、第13条の２、第16条の２関係）

少量危険物用表示

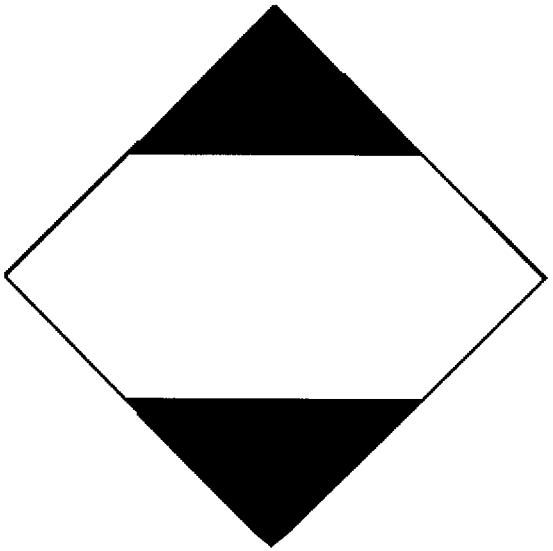

注１　ふちの線の太さは２ミリメートル以上とする。

２　一辺の大きさは、10センチメートル（コンテナに付す場合にあっては25センチメートル）以上とする。ただし、危険物を収納する容器が小さい場合にあっては、５センチメートル以上として差し支えない。

３　航空機による爆発物等の輸送基準等を定める告示（昭和58年運輸省告示第572号）第23条の規定による場合にあっては、同告示第７号様式を使用して差し支えない。

第７号様式を次のように改める。

第７号様式（第25条の６関係）

（火薬類、引火性液体類、可燃性物質類、酸化性物質類、毒物類、腐食性物質又は有害性物質を収納するポータブルタンク）

Owner's registration number			
MANUFACTURING INFORMATION			
Country of manufacture			
Year of manufacture			
Manufacturer			
Manufacturer's serial number			
APPROVAL INFORMATION			
	Approval country		
	Authorized body for design approval		
	Design approval number		
Shell design code (pressure vessel code)			
PRESSURES			
MAWP			
Test pressure			
Initial pressure test date		Witness stamp :	
External design pressure			
MAWP for heating／cooling system			
TEMPERATURES			
Design temperature range	℃ to ℃		
MATERIALS			
Shell material(s) and material standard reference(s)			